



# Protran<sup>®</sup> PR3441

Submersible Depth/Level  
Pressure Transmitter



- Piezoresistive sensor technology for excellent stability and repeatability
- Robust stainless steel construction
- Pressure ranges available from 0-1 mWG
- High strength, moulded cable for protection against ingress
- ATEX/IECEx option available (includes M1 for mining applications)
- DNV GL certification available





# Protran® PR3441

Submersible Depth/Level  
Pressure Transmitter

## Description

The PR3441 submersible transmitter has been designed for the accurate measurement of the depth and level of liquids in many applications.

Standard output signal is 4-20 mA two wire with supply range 13-36 Vdc. Electrical connection is via a high strength moulded polyurethane cable with integral tube for excellent trouble-free venting to the surface atmosphere. The standard depth transmitter is fitted with a stainless steel nose cone with radial inlet holes to prevent sludge build-up. The PR3441 transmitter is suitable for depth and level measurement in boreholes 25 mm diameter or greater. Lightning Protection is available on request.



Applications include borehole level and reservoir level monitoring, water mains pressure measurement in inspection chambers, power level and outlet pressure measurement on submersible pumps.

An optional ATEX and IECEx approved version of this product is available for explosion protection for flammable gases (zone 0), dusts (zone 20) and mining areas (group I MI).

DNV GL rules for classification of ships, high speed & light craft and DNV GL offshore standards.

## Dimensions (in mm)

| ELECTRICAL CONNECTION (mA) |               |
|----------------------------|---------------|
| Red                        | +supply       |
| Blue                       | 4-20mA signal |
| Screen                     | to case       |

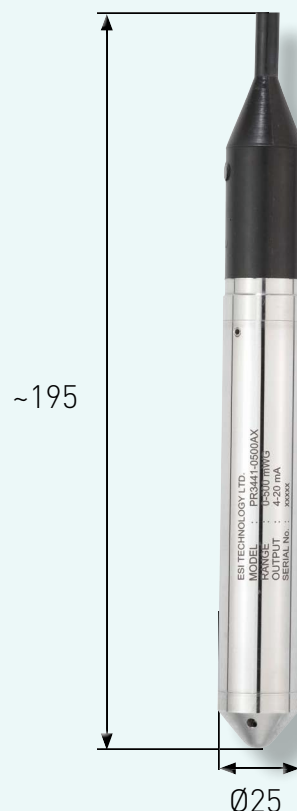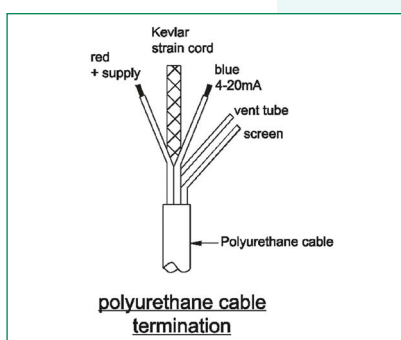



# Protran® PR3441

## Submersible Depth/Level Pressure Transmitter

### Technical Data

| Type:                                  | PR3441   | PR3445           | PR3446            |
|--|--|------------------|-------------------|
| <b>Sensor Technology:</b>              | Isolated Piezoresistive Silicon  |                  |                   |
| <b>Output signal:</b>                  | 4-20 mA (2 wire)   | 0-5 Vdc (4 wire) | 0-10 Vdc (4 wire) |
| <b>Supply Voltage:</b>                 | 13 -36 VDC   | 13 -30 VDC       | 13 -30 VDC        |
| <b>Pressure Reference:</b>             | Vented Gauge   |                  |                   |
| <b>Protection of Supply Voltage:</b>   | Protected against supply voltage reversal up to 50 V   |                  |                   |
| <b>Lightening Protection:</b>          | On Request   |                  |                   |
| <b>Standard Pressure Ranges (mWG):</b> | 0-1 mWG; 0-10 mWG; 0-20 mWG; 0-50 mWG; 0-100 mWG; 0-250 mWG; 0-500 mWG (other options available)   |                  |                   |
| <b>Standard Pressure Ranges (psi):</b> | 0-3 psi; 0-5 psi; 0-7.5 psi; 0-10 psi; 0-15 psi; 0-30 psi; 0-50 psi; 0-100 psi; 0-200 psi; 0-300 psi (other options available)   |                  |                   |
| <b>Overpressure Safety:</b>            | 2x all ranges  |                  |                   |
| <b>Load Driving Capability:</b>        | 4-20 mA: $RL < [UB - 13 V] / 20 \text{ mA}$ ; (e.g. with supply voltage (UB) of 36V, max. load (RL) is 1150 $\Omega$ ; 10 mV/V: n/a; 0-5 V: max. load $RL > 5 \text{ K}\Omega$ ; 0-10 V: max. load $RL > 10 \text{ K}\Omega$ |                  |                   |
| <b>Accuracy NLHR:</b>                  | $\leq \pm 0.3 \%$ of span BFSL   |                  |                   |
| <b>Zero Offset and Span Tolerance:</b> | $\pm 0.5\%$ FS at room temperature   |                  |                   |
| <b>Operating Ambient Temperature:</b>  | -20 °C - +60 °C (-4 °F to +140 °F)   |                  |                   |
| <b>Operating Media Temperature:</b>    | Media must not freeze around the sensor  |                  |                   |
| <b>Storage Temperature:</b>            | +5 °C to +40 °C (+41 °F to +104°F) Recommended Best Practice   |                  |                   |
| <b>Temperature Effects:</b>            | $\pm 2.0\%$ FS total error band for -20 °C - +60 °C. Typical thermal zero and span coefficients $\pm 0.03\%$ FS/°C   |                  |                   |
| <b>ATEX/IECEx Approval Option:</b>     | Ex II 1 G Ex ia IICT4 Ga (zone 0)<br>Ex II 1 D Ex ia IIIC T135°C Da (zone 20)<br>Ex I M 1 Ex ia I Ma (group 1 M1)  |                  |                   |
| <b>ATEX/IECEx Safety Values:</b>       | $U_i = 28 \text{ V}$ $I_i = 119 \text{ mA}$<br>$P_i = 0.65 \text{ W}$ $L_i = 0.1 \mu\text{H}$<br>$C_i = 62 \text{ nF}$<br>Temperature Range = -20 °C to +70 °C<br>Max. cable length = 105 m                                  |                  |                   |
| <b>DNV GL Approval Class:</b>          | Temperature: D; Humidity: B; Vibration: B; EMC: B; Enclosure: C (contact sales for more information)   |                  |                   |
| <b>Electromagnetic Compatibility:</b>  | Emissions: EN61000-6-4; Immunity: EN61000-6-2; Certification: CE Marked  |                  |                   |
| <b>Insulation Resistance:</b>          | $> 100 \text{ M}\Omega @ 50 \text{ VDC}$   |                  |                   |
| <b>Wetted Parts:</b>                   | SAE 316L stainless steel housing and diaphragm, polyurethane cable and nitrile (NBR) o-ring seal   |                  |                   |
| <b>Pressure Media:</b>                 | All fluids compatible with SAE 316L stainless steel, polyurethane and nitrile (NBR)  |                  |                   |
| <b>Pressure Connection:</b>            | Stainless steel nose cone with radial pressure inlets  |                  |                   |
| <b>Electrical Connection:</b>          | Submersible black polyurethane cable moulded to housing. With integral screen, Kevlar strain cord and vent tube. Conductor size 7/0.20 mm (24 AWG), resistance 8.9 $\Omega / 100 \text{ m}$ (x2)                             |                  |                   |



# Protran<sup>®</sup> PR3441

Submersible Depth/Level  
Pressure Transmitter

## Order Matrix

| Output  | Wires | Type   | Electrical Connector | Pressure Range | Process Connection |
|---|-------|--------|----------------------|----------------|--------------------|
| 4-20mA  | 2     | PR3441 |                      |                |                    |
| <b>Electrical Connection / Option</b>             |       |        |                      |                |                    |
| No special option required                        |       |        | -                    |                |                    |
| Cable outlet 1m screened                          |       |        | EX                   |                |                    |
| <b>Pressure Range in mWG (Metres Water Gauge)</b> |       |        |                      |                |                    |
| 0-1 mWG   |       |        |                      | 0001           |                    |
| 0-5 mWG   |       |        |                      | 0005           |                    |
| 0-10 mWG  |       |        |                      | 0010           |                    |
| 0-50 mWG  |       |        |                      | 0050           |                    |
| 0-100 mWG   |       |        |                      | 0100           |                    |
| 0-250 mWG   |       |        |                      | 0250           |                    |
| 0-500 mWG   |       |        |                      | 0500           |                    |
| <b>Process Connection</b>                         |       |        |                      |                |                    |
| Protective nose cone                              |       |        |                      |                | AX                 |
| 1/4" BSP (G1/4)                                   |       |        |                      |                | AB                 |

### Cable

Cable length is specified by adding a 3 digit numeric code as a suffix to the part number.  
Example -010 = 10 metres.  
Max cable length 500 metres

### Order Number Example

PR3441-0010AX-010

For options not listed please contact sales team.

**DISCLAIMER :** ESI Technology Ltd operates a policy of continuous product development. We reserve the right to change specification without prior notice. All products manufactured by ESI Technology Ltd are calibrated using precision calibration equipment with traceability to international standards.



t. +44(0)1978 262 255  
e. sales@esi-tec.com

[www.esi-tec.com](http://www.esi-tec.com)